

REVOLUTION
EuroPlus
SERIES

FOURTEEN

INTERLOCKING PANEL

DATA SHEET

Revolution
BY DESIGN

DATA SHEET

INTERLOCKING PANEL

Introducing the EuroPlus Interlocking Panel, the latest addition to the innovative Revolution by Design product range.

As a key element of the new EuroPlus Series, this panel offers a sleek and modern solution for wall cladding. Its distinctive features include clean lines achieved through a negative detail, express joint and concealed fixings, providing a contemporary aesthetic.

The versatility of this panel shines through in its various applications, allowing for vertical or horizontal installation as wall cladding or as a soffit panel.

The EuroPlus Interlocking Panel stands as the ideal choice for achieving sophisticated wall cladding in both commercial and residential structures.

REVOLUTION
EuroPlus
SERIES



INTERLOCKING PANELS




INDIVIDUAL PANEL

Standard Cover	200mm		250mm		300mm	
Maximum Length	6000mm					
Recess Width	0mm	5mm	10mm			15mm
Depth	24mm					
Fixing Orientation	Vertical				Horizontal	
Stop Ends	Available on request					
Available Finishes	Metallic 0.55 BM G300 Heritage Galvanised COLORBOND® 0.55 BMT G300 COLORBOND® ULTRA 0.55 BMT G300 NEXTEEL™ NextSTAR 0.55 BMT G300 NEXTEEL™ NextSTAR ULTRA 0.55 BMT G300 Corten COLORBOND® Aluminum <i>Minimum Roll Length 600mm</i>					

SUBSTRUCTURE DETAILS

Top Hats or Battens should have a maximum centre of 600mm, should be on a level plane and be placed at right angles to the panels.


Alternatively the EuroPlus Interlocking Panel can be installed on a 15mm plywood; ensuring the plywood is fixed on a level plane and with particular attention paid to the butt joint of two plywood sheets.

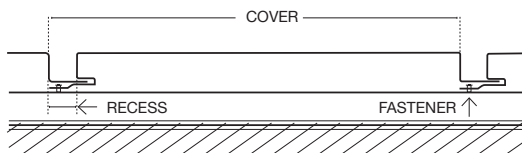

Oil Canning is an inherent characteristic of non-ferrous metals with broad flat areas. The Architect, Builder, and Homeowner needs to be aware that oil canning may affect the overall aesthetic outcome. There are measures that can be taken during design and installation to minimise the risk of oil canning such as ensuring the plywood is flush, the panels are fixed vertically, limiting the continuous length of each panel, and reducing the size of the pan. For more information please go to our website, revbydesign.com.au

INSTALLATION DETAILS

HORIZONTAL PANELS

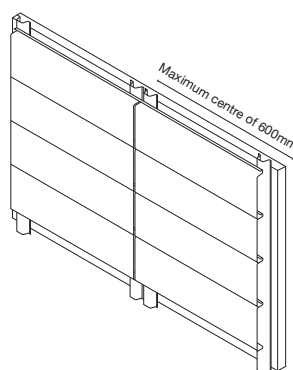

VERTICAL PANELS

