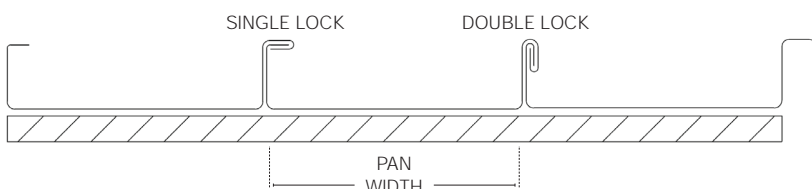


# CUSTOMER

Order no:	Date ordered:
Contact name and number:	Date required:
Delivery address:	
Project name:	
Materials (select one):	
<input type="checkbox"/> Metallic 0.55 BM G300 <input type="checkbox"/> NEXTEEL™ NextSTAR ULTRA 0.55 BMT G300	
<input type="checkbox"/> Heritage Galvanised	
<input type="checkbox"/> COLORBOND® 0.55 BMT G300	
<input type="checkbox"/> COLORBOND® ULTRA 0.55 BMT G300	
<input type="checkbox"/> NEXTEEL™ NextSTAR 0.55 BMT G300	
Colour:	
Rib height:	
<input type="checkbox"/> 25mm <input type="checkbox"/> 38mm	
Pan width:	
<input type="checkbox"/> 330mm <input type="checkbox"/> 430mm	
<input type="checkbox"/> Custom _____ mm (Min 230 Max 530)	
Clips (box of 50) quantity required:	
Sliding _____ Fixed _____	

## CUTTING LIST

[illegible]

- Maximum Length: 8m
- Minimum Length: 600mm
- Production lead times apply

*Oil Canning is an inherent characteristic of non-ferrous metals with broad flat areas. The Architect, Builder, and Homeowner needs to be aware that oil canning may affect the overall aesthetic outcome. There are measures that can be taken during design and installation to minimise the risk of oil canning such as ensuring the plywood is flush, the panels are fixed vertically, limiting the continuous length of each panel, and reducing the size of the pan. For more information please go to our website, [rebydesign.com.au](http://rebydesign.com.au)*