


Fascia Gutter

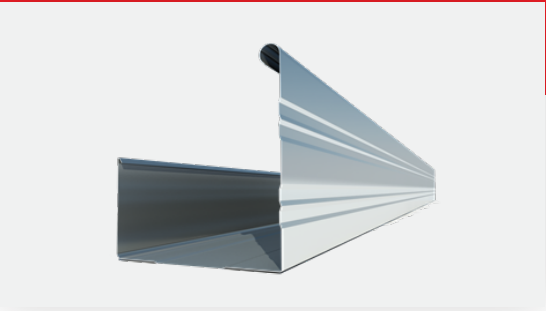

OVERVIEW

The Fascia Gutter is versatile, reliable and customisable. With a high front profile, it is ideal for concealing sheet ends and enhancing the aesthetic appeal of your roofing system.


CROSS SECTIONAL AREA

8024mm²

PROFILE OPTIONS

Available With or Without Return

PROFILE



- A = 68mm
- B = 116mm
- C = 132mm

* Visit revbydesign.com.au for CAD & Revit Files

AVAILABILITY

LOCATION



SOUTH AUSTRALIA



VICTORIA

MATERIAL

- | | |
|-------------------------|--------------------------|
| • Zinalume® AM125 | • Nexalume™ AZ150 |
| • COLORBOND® Steel | • NEXTEEL NextSTAR™ |
| • COLORBOND® Steel Matt | • NEXTEEL NextSTAR™ Matt |

INSTALLATION

EXTERNAL BRACKET

Not Available

INTERNAL BRACKET

Available

SUPPORTING SPACING

1000mm

RECOMMENDED FALL

1 in 500mm

SLOTTING AVAILABLE

No

PROTECTIVE PLASTIC

Yes

PRODUCT SPECIFIC ITEMS

INTERNAL BRACKET



SECONDARY BRACKET



STOP ENDS



STANDARD SPECIFICATION

ZINCALUME® AM125

Steel base thickness (0.42) with an Aluminium Zinc Magnesium Alloy Coated Steel Coating. Zincalume AM125 Substrate compliance AS 1397:2021, 125g per square metre minimum Metallic Coating Mass.

SUBSTRATE	Aluminium Zinc Magnesium Alloy Coated Steel - AS 1397:2021
COATING	AM125 = 125g per m ² Minimum Metallic Coating Mass

NEXALUME™ AZ150

Steel base thickness (0.42) with a Hot-Dipped Aluminium Zinc Magnesium Alloy Coating. Nexalume AZ150 Substrate compliance AS 1397:2021, 150g per square metre minimum Metallic Coating Mass.

SUBSTRATE	Hot-Dipped Aluminium Zinc Magnesium Alloy Coated Steel - AS 1397:2021
COATING	AZ150 = 150g per m ² Minimum Metallic Coating Mass

COLORBOND® STEEL AM100

RELEVANT FOR COLORBOND® STEEL, COLORBOND® MATT STEEL PRODUCTS

Steel base thickness (0.42) with an Aluminium Zinc Magnesium Alloy Coated Steel with Activate® Technology Coating. COLORBOND® Steel AM100 Substrate compliance AS 1397:2021, and Paint Finish Substrate compliance AS/NZS 2728:2013 Type 3.

SUBSTRATE	Aluminium Zinc Magnesium Alloy Coated Steel with Activate® Technology - AS 1397:2021
COATING	AM100 = 100g per m ² Minimum Metallic Coating Mass
PRIMER	Nominal 5µm Universal Corrosion Inhibitive Primer
PAINT	Nominal 20µm Finish Coat AS/NZS 2728:2013 Type 3
PROTECTIVE PLASTIC	Nominal 50µm CORSTRIP® (if required)

NEXTEEL™ AM100

RELEVANT FOR NEXTSTAR™, NEXTSTAR™ MATT STEEL PRODUCTS

Steel base thickness (0.42) with an Aluminium Zinc Magnesium Alloy Coated Steel Coating. NEXTEEL™ AM100 Steel Substrate compliance AS 1397:2021, and Paint Finish Substrate compliance AS/NZS 2728 Type 4.

SUBSTRATE	Aluminium Zinc Magnesium Alloy Coated Steel - AS 1397:2021
COATING	AM100 = 100g per m ² Minimum Metallic Coating Mass
PRIMER	Nominal 5µm Polyester
PAINT	Nominal 20µm Advanced Durability Polyester AS/NZS 2728 Type 4
PROTECTIVE PLASTIC	Nominal 50µm NextSTRIP (if required)