


115 OG Gutter

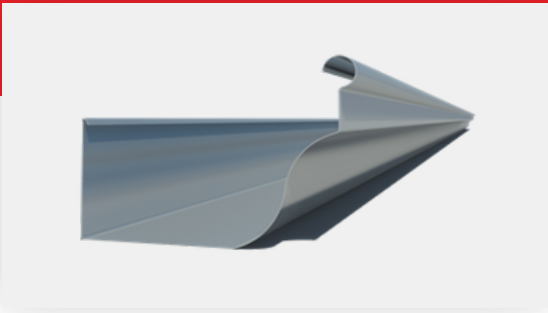

OVERVIEW

The 115 OG Gutter has a traditional shape that has a modern hi-tensile finish. The gutter profile is popular in new home and country markets.


CROSS SECTIONAL AREA

6310mm²

LARGEST OUTLET

75mm / 90mm

PROFILE

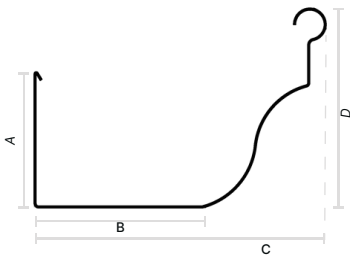

- A = 62mm B
- = 77mm C =
- 134mm D =
- 91mm

* Visit edgebp.com.au for CAD & Revit Files

AVAILABILITY

LOCATION



SOUTH AUSTRALIA



VICTORIA

MATERIAL & GUAGE

- 0.42 BMT

- UniZinc® Select
- UniCote® Select
- UniCote® Coastal
- UniCote® LUX

INSTALLATION

EXTERNAL BRACKET

Available

INTERNAL BRACKET

Available

SUPPORTING SPACING

1000mm

RECOMMENDED FALL

1 in 500mm

SLOTING AVAILABLE


Yes

PROTECTIVE PLASTIC


Yes

PRODUCT SPECIFIC ITEMS


EXTERNAL BRACKET

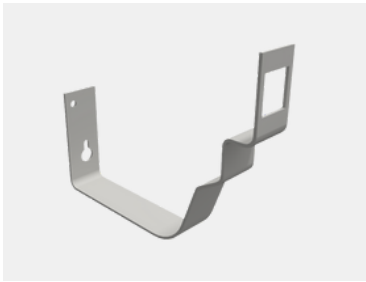


CAST MITRES

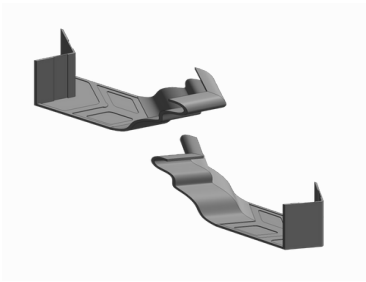

STOP ENDS

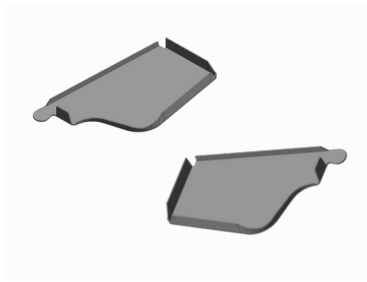

P CLIPS

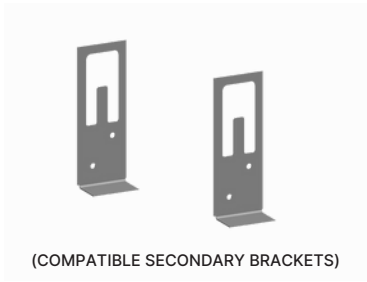

STANDARD SPECIFICATION

UniZinc®

Steel with an Aluminium Zinc Magnesium Alloy Coated Steel Coating. Substrate compliance S 1397:2021.

SUBSTRATE	Aluminium Zinc Magnesium Alloy Coated Steel - AS 1397:2021
COATING	AM125 = 125g per m2 Minimum Metallic Coating Mass

UniCote® Select, UniCote® LUX

Relevant for UniCote® Select and UniCote® Lux steel products.

Steel with a Zinc / Aluminium / Magnesium Alloy Coated Steel. Conforms to AS/NZS 2728:2013.

SUBSTRATE	Hot-dipped Zinc / Aluminium / Magnesium Alloy Coated Steel. Alloy coating weight; 150gm/m2.
PRE-TREATMET	Corrosion resistant conversion coating
PRIMER COAT	Flexible corrosion resistant primer. Nominal film thickness is 7µms ± 1µms on the top side and 5µms ± 1µms on the reverse
FINISH COAT	Super Advanced Durable Polyester coating (SADP). Nominal film thickness 18µms ± 2µms.
BACKING COAT	Grey polyester wash coat. Nominal thickness is 5µms ± 1µms.
PROTECTIVE FILM	Available on Request for UniCote® LUX

UniCote® Coastal

Relevant for UniCote® Coastal steel products.

Steel with a Zinc / Aluminium / Magnesium Alloy Coated Steel. Conforms to AS/NZS 2728:2013.

SUBSTRATE	Hot-dipped Zinc / Aluminium / Magnesium Alloy Coated Steel. Alloy coating weight; 210gm/m2.
PRE-TREATMET	Corrosion resistant conversion coating
PRIMER COAT	Flexible corrosion resistant primer. Nominal film thickness is 7µms ± 1µms on the top side and 5µms ± 1µms on the reverse
FINISH COAT	Super Advanced Durable Polyester coating (SADP). Nominal film thickness 18µms ± 2µms.
BACKING COAT	Grey polyester wash coat. Nominal thickness is 5µms ± 1µms.